



# Clicky Comfort Sensor v2.4

---

Datasheet

 **LoRa Alliance** Certified™



## Document history


Version	Date	Comment	Author
1.0	14-02-2018	Initial release	RG
1.1	20-02-2018	Updated product name	RG
1.2	10-04-2018	Added LoRa Alliance certification	RG

## Clickey Comfort Sensor v2.4

Compact, LoRaWAN specification 1.0.2 compliant, Class A, 868MHz, battery powered, automatic room condition sensor unit with multiple sensors. Ideally suited to create 'Smart Meeting Rooms' and 'Smart buildings'.

The onboard sensors register:

- Temperature
- Humidity
- Light
- Sound
- CO<sub>2</sub>
- Human presence (movement)
- Human interaction (using the pushbutton)
- Battery level

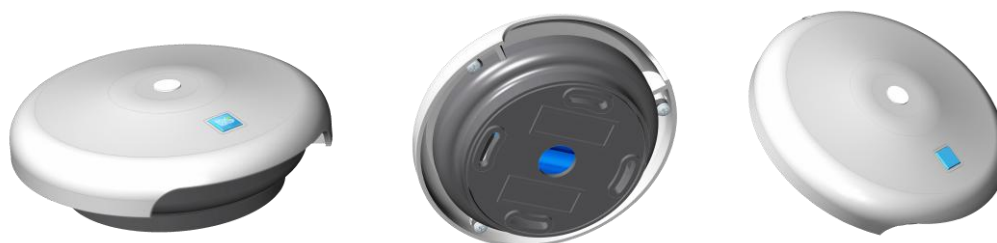

### Specifications

Functionality	Multisensor LoRaWAN Class A device
Power supply	2x 3,6V Lithium, size AA batteries (not included)
Battery life	12+ months (typical; 2x per day reporting)
Operating temperature	0 °C to +50 °C
Sensors	CO <sub>2</sub> , Light, PIR, Relative Humidity, Temperature and sound
Antenna	Integrated 3,0 dB
Chipset	Semtech (SX1276) + STM (STM32L)
Processor	STM32L0, ARM Cortex-M0+
Water resistance	Indoor use only
Dimensions	(LxH) Ø44 mm x 13 mm
Weight	105 gr.
Certifications	CE, LoRa Alliance certified
Controls	Dashboard on International Clickey Cloud Portal (ICCP)
Portal Data storage	3 months rolling, CSV-file download and graphs

### Disclaimer

Use and proper functioning of Clickey devices is subject to local LoRa network coverage and internet availability. Do not use for critical situations. CLICKEY solutions is not liable for any damages resulting from the use of our products.



**CERTIFICATE OF COMPLIANCE**

**LoRaWAN™ Certified Product**

The LoRa Alliance™ is pleased to congratulate **Clickey Solutions B.V.** on the completion of the LoRaWAN™ Certification Program for the following product:

MANUFACTURER	Clickey Solutions B.V.
TYPE OF DEVICE	Sensor
MODEL IDENTIFICATION	Clickey Comfort Sensor v2.4
LoRaWAN REGION	EU863-870
FIRMWARE VERSION	V1.0
HARDWARE VERSION	V3.0
CERTIFICATION DATE	March 22, 2018
LoRaWAN SPECIFICATION VERSION	V1.0.2
LoRaWAN REGIONAL PARAMETERS VERSION	N/A
Class of Operation (A, B or C)	A
OPTIONAL ADR FEATURE SUPPORTED	Yes

This Certificate serves to confirm that the above mentioned product has passed all relevant tests in conjunction with the LoRaWAN™ Certification Program and is deemed compliant to it. The Manufacturer has been granted the right to use the Certification logo.

The usage of the Certification logo is limited to the described device and does not encompass any changes, firmware upgrades or subsequent versions and models after the listed test date. All usage guidelines for the LoRa Alliance™ also apply to the above.

Congratulations on your compliance to the program!

Sincerely,

Geoff Mulligan, Chair

3855 SW 153rd Drive • Beaverton, OR 97003 USA • Phone +1.503.619.5231 • Fax +1.503.644.6708  
[www.lora-alliance.org](http://www.lora-alliance.org)

## Customer support

Users of Clickey hardware and/or Cloud portal can receive assistance by contacting their sales representative or by contacting technical support at [support@clickey.eu](mailto:support@clickey.eu).

## Copyright © 2018 CLICKEY solutions

All rights reserved. This paper or any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of CLICKEY solutions.

Information contained in this publication regarding device specifications is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. CLICKEY solutions disclaims all liability arising from this information and its use. Use of CLICKEY solutions devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless CLICKEY solutions from any and all damages, claims, suits, or expenses resulting from such use.